NOTES:


- 1. SUBSTRATE:
 - **FUSED SILICA**

5. FINE GRIND SURFACE


- 2. ROHS COMPLIANT
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: 1064 V-COAT

R(ABS) <0.25% @ 1064nm





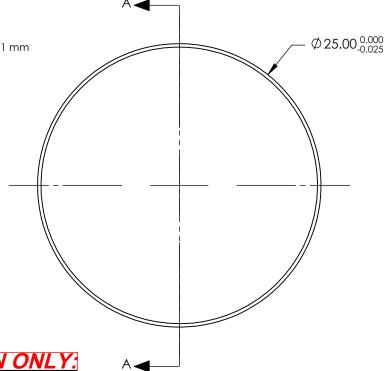

PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2				
SHAPE	CONCAVE	PLANO				
RADIUS	-45.84	INFINITY				
SURFACE QUALITY	40-20	40-20				
CLEAR APERTURE	Ø24	Ø24				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				

\$1	<u>)</u>
2.50±0.10	

0.30 MAX FLAT ANNULUS

Edmund Option

1 OF 1

	THIRD ANGLE PROJECTION	$\phi \lhd$	TITLE	25.0mm Dia. x -100 FL, 1064 V-Coat, UV Concave Lens	Plano-
_	ALL DIMS IN	mm	DWG NO	21030	SHEET

21039

SECTION A-A