
## NOTES:

- 1. SUBSTRATE:
  - **FUSED SILICA**
- 2. SURFACE S2 TO BE PARALLEL WITH S1 TO 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1:Ravg >96% @ 700 - 2000nm Ravg >96% @ 2000 - 10,000nm S2:NONE



5. ROHS COMPLIANT

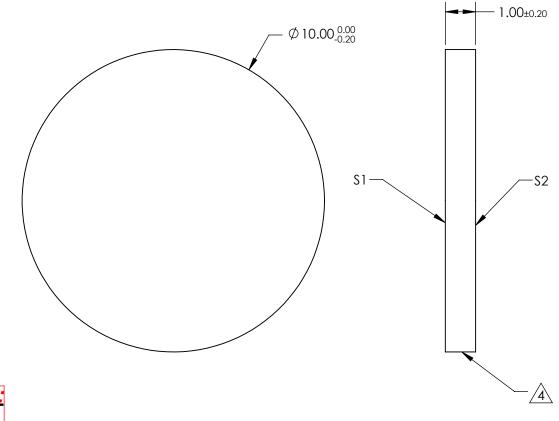

## FOR INFORMATION ONLY: PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SURFACE QUALITY	20-10	COMMERCIAL POLISH	THIRD A
SURFACE FLATNESS	$\lambda/10$ (Measured Pre-Coating)	N/A	
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL D

	dmund
--	-------

**Optics®** 

THIRD ANGLE TITLE		TITLE	10mm Diameter, 1mm Thick, Diameter Protected Gold Coated, λ/10 Mirror	
ALL DIMS IN	mm	DWG NO	26103	SHEET 7 OF 28