NOTES:

1. SUBSTRATE:

FUSED SILICA CORNING 7980


2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1&\$2: VIS-NIR (400-1000nm) Rabs ≤0.25% @ 880nm Ravg ≤1.25% @ 400 - 870nm Ravg ≤1.25% @ 890 - 1000nm


4.\SIX SIDEWALLS:

SURFACE ACCURACY: COMMERCIAL POLISH

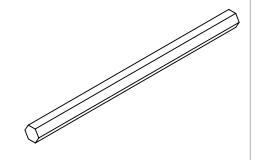

SHEET

3 OF 24

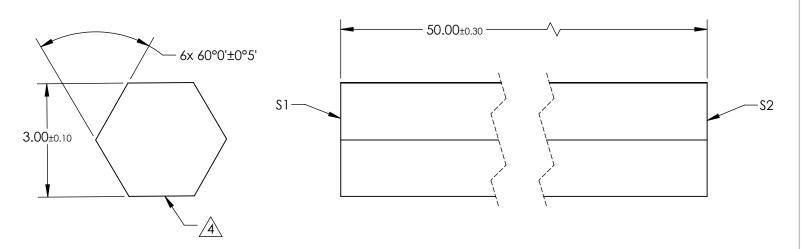

DWG NO

26547

FOR INFORMATION ONLY: PARTS TO THIS DRAWING

SURFACE QUALITY

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

60-40

DIMENSIONS ARE FOR REFERENCE ONLY				Edmund Optics®	
	\$1	\$2	THIRD ANGLE PROJECTION	TITLE	3mm Aperture x 100mm L, VIS-NIR Coated, Low NA, Fused Silica Light Pipe
SHAPE	PLANO	PLANO			
SURFACE FLATNESS	1λ	1λ			

60-40

ALL DIMS IN

mm