
NOTES:

1. SUBSTRATE:

FUSED SILICA CORNING 7980

- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI




P

® Edmund Ontics®

4. SIX SIDEWALLS:

5. ROHS COMPLIANT

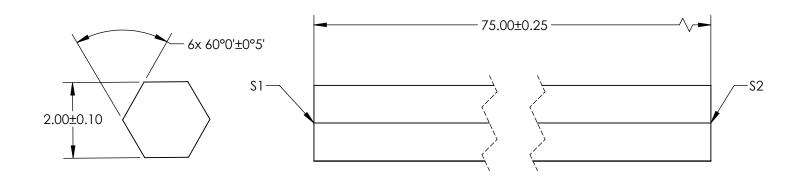

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

| | \$1 | \$2 | | TITLE | 2mm Aperture x 75mm L, VIS-EXT Coated, Low NA, Fused Silica Light Pipe | nted | |
|------------------|---------|---------|------------------------|-------|---|-------|------------------|
| SHAPE | PLANO | PLANO | THIRD ANGLE PROJECTION | | | | |
| SURFACE FLATNESS | 1λ | 1λ | | 1 | | | |
| SURFACE QUALITY | 60 - 40 | 60 - 40 | ALL DIMS IN | mm | DWG NO | 70716 | SHEET 3 OF 21 |