## NOTES:


1. SUBSTRATE:


FUSED SILICA CORNING 7980

- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI



5. ROHS COMPLIANT



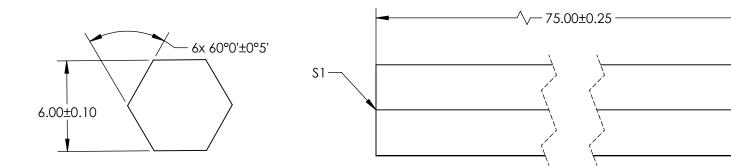

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2	
SHAPE	PLANO	PLANO	TH PR
SURFACE FLATNESS	1λ	1λ	
SURFACE QUALITY	60 - 40	60 - 40	A
	•	•	

<b>Edmund Optics</b> ®	R
------------------------	---

THIRD ANGLE TITLE		TITLE	6mm Aperture x 75mm L, VIS-EXT Coated, Standard NA, Fused Silica Light Pipe	
ALL DIMS IN	mm	DWG NO	70727	SHEET 14 OF 21