

TECHSPEC[®] 6° Beam Dev. 12.5mm Dia. VIS-NIR, N-BK7 Wedge Prism



Stock **#35-798** 5 In Stock

-

1

+

C\$77^{.91}

ADD TO CART

Volume Pricing	
Qty 1-5	C\$77.91 each
Qty 6-25	C\$62.33 each
Qty 26-49	C\$58.62 each
Need More?	Request Quote

Product Downloads

SPECIFICATIONS

General

Type:
Wedge Prism

Note:
Specify this is S1 & S2 power and irregularity, not


the overall power of the wedge	
Physical & Mechanical Properties	
12.50 +0.00/-0.10	Diameter (mm):
1.50	Thickness (mm):
Protective as needed	Bevel:
11° 21'	Wedge Angle (arcmin):
Optical Properties	
±30	Angle Tolerance (arcsec):
VIS-NIR (400-1000nm)	Coating:
632.8	Design Wavelength DWL (nm):
N-BK7	Substrate: ☐
20-10	Surface Quality:
Beam Deviation	Image Orientation:
R _{abs} ≤0.25% @ 880nm R _{avg} ≤1.25% @ 400 - 870nm R _{avg} ≤1.25% @ 890 - 1000nm	Coating Specification:
400 - 1000	Wavelength Range (nm):
0.50	Power (fringes) @ 632.8nm:
0.20	Irregularity (fringes) @ 632.8nm:
6.00	Ray Deviation @ 633nm (°):
10.51	Power (diopters):
11.35°	Wedge Angle (°):
Material Properties	
7.1	Coefficient of Thermal Expansion CTE (10 ⁻⁶ /°C):
Regulatory Compliance	
Compliant	RoHS 2015:
View	Certificate of Conformance:
Compliant	Reach 235:

PRODUCT DETAILS

- Ideal for Beam Steering
 - 0.5° - 15° Beam Deviation Options
 - Available Uncoated or Anti-Reflection Coated
 - [Anamorphic Prism Pair](#) Also Available
- Wedge prisms can be used individually to deviate a laser beam a set angle, or two wedge prisms can be used together for beam steering applications. A single wedge prism's ability to deviate the angle of an incident beam is measured in Diopters with 1 diopter deviating the beam 1cm at a 1m working distance.
- Two wedge prisms can be used as an anamorphic pair for beam shaping (to correct the elliptical shape of diode outputs). Wedge prisms can also be paired to steer a beam anywhere within a circle described by the full angle 4θ, where θ is the deviation from a single prism. This beam steering is accomplished by rotating the two wedge prisms independently of each other and is typically used to scan a beam to different locations in imaging applications.
- Note: Beam deviation is shown in degrees and diopters. One diopter is 1cm of deviation at a distance of 1m from the prism.




TECHNICAL INFORMATION

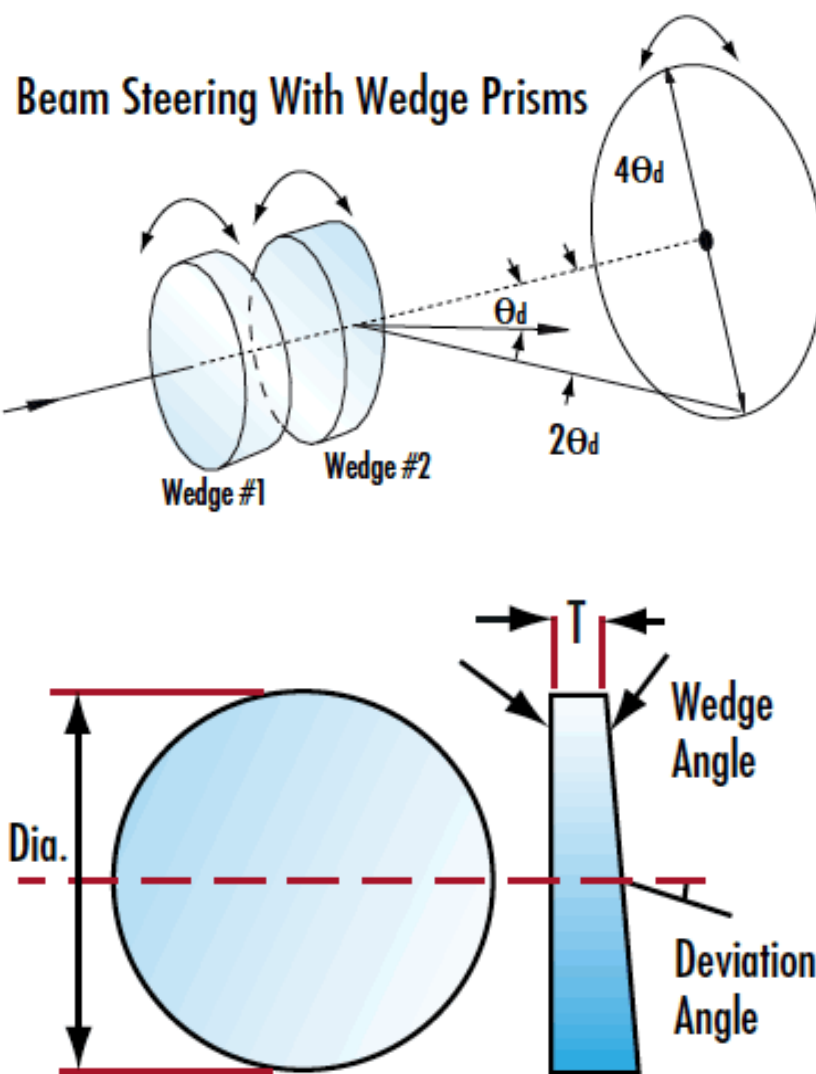

N-BK7


Uncoated N-BK7 Typical Transmission

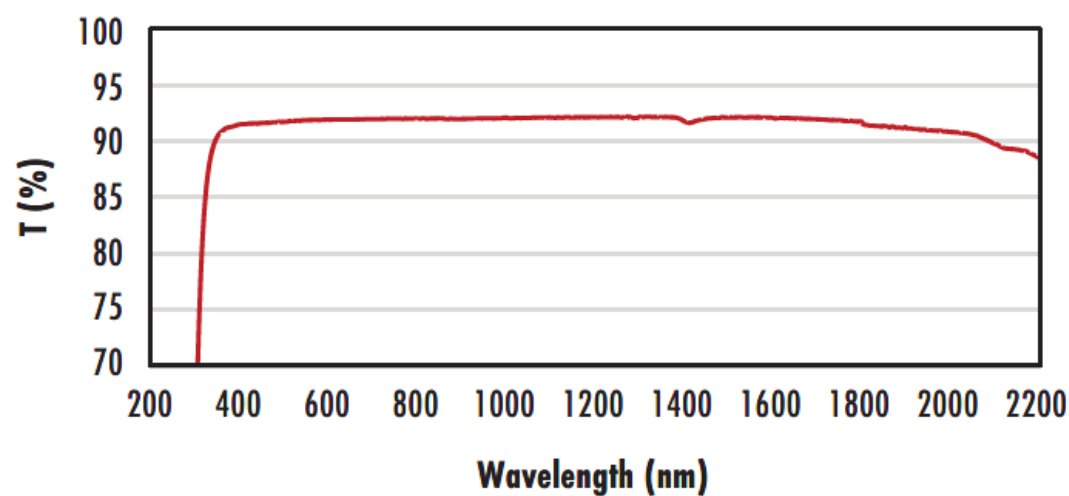

Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.

[Click Here to Download Data](#)

N-BK7 with MgF_2 Coating Typical Transmission

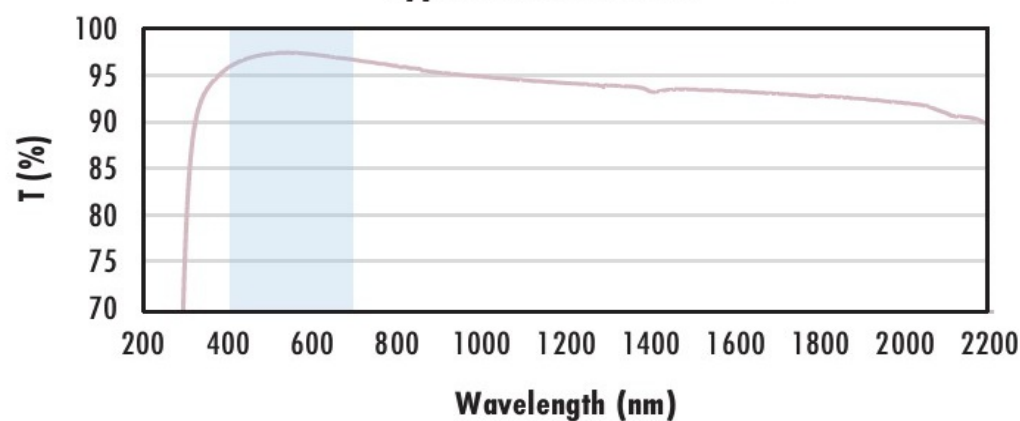

Typical transmission of a 3mm thick N-BK7 window with MgF_2 (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{\text{avg}} \leq 1.75\% @ 400 - 700\text{nm}$ (N-BK7)

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

N-BK7 with VIS-EXT Coating Typical Transmission

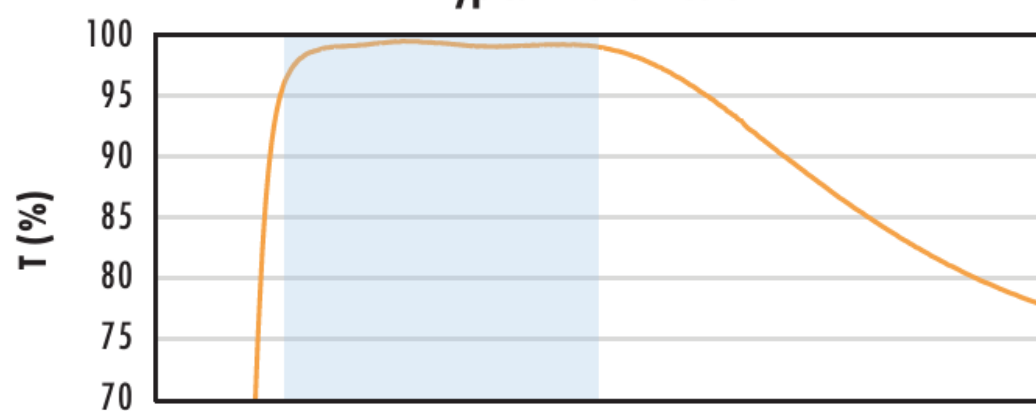





Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{\text{avg}} \leq 0.5\% @ 350 - 700\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

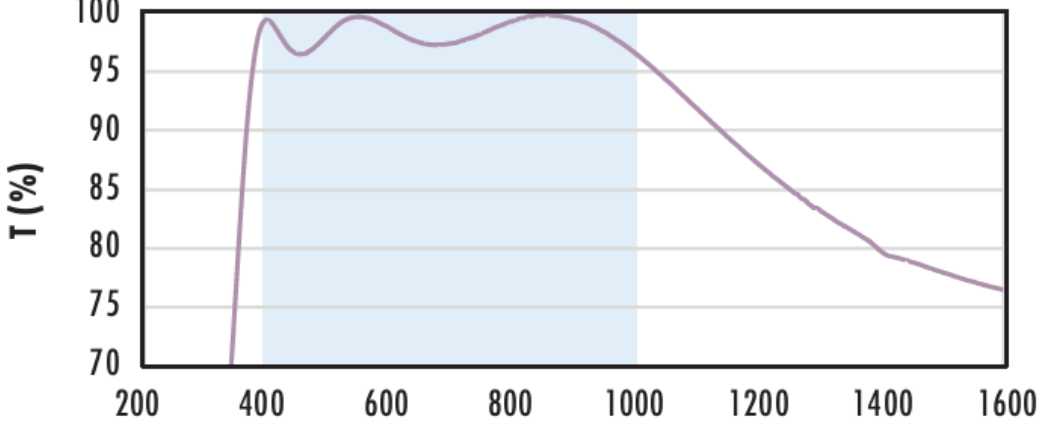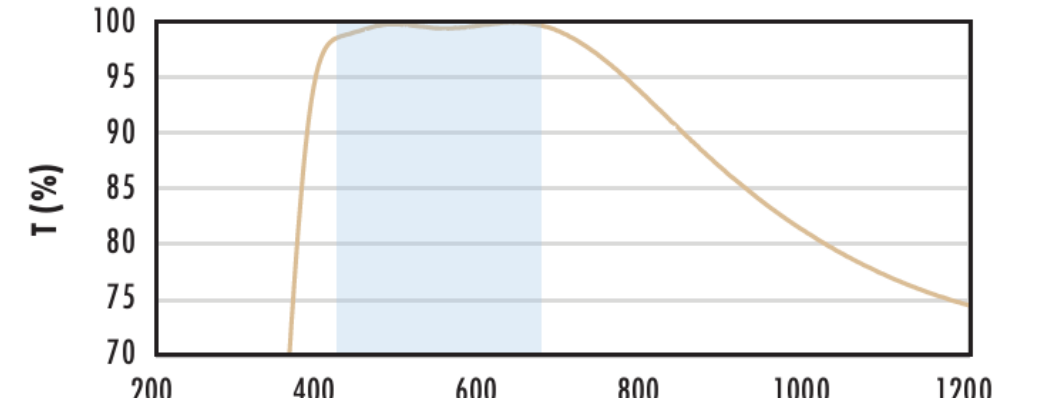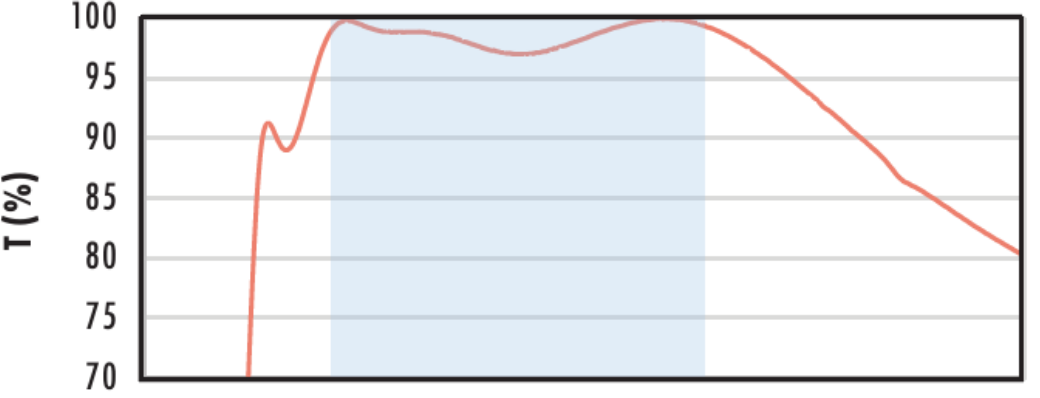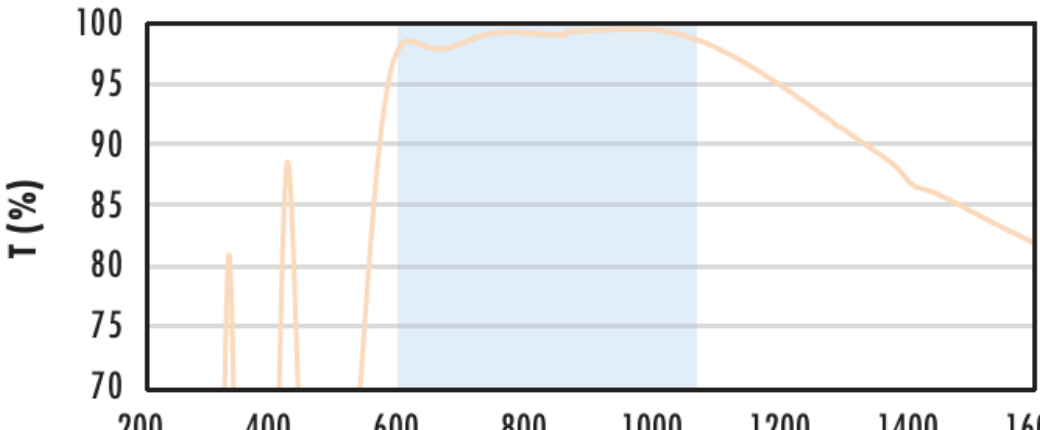20040060080010001200 Wavelength (nm)	
N-BK7 with VIS-NIR Coating Typical Transmission  Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\% \text{ @ } 880\text{nm}$ $R_{avg} \leq 1.25\% \text{ @ } 400 - 870\text{nm}$ $R_{avg} \leq 1.25\% \text{ @ } 890 - 1000\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with VIS 0° Coating Typical Transmission  Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.4\% \text{ @ } 425 - 675\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with YAG-BBAR Coating Typical Transmission  Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{abs} \leq 0.25\% \text{ @ } 532\text{nm}$ $R_{abs} \leq 0.25\% \text{ @ } 1064\text{nm}$ $R_{avg} \leq 1.0\% \text{ @ } 500 - 1100\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with NIR I Coating Typical Transmission  Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with NIR I (600 - 1050nm) coating at 0° AOI. The blue shaded region indicates the coating design wavelength range, with the following specification: $R_{avg} \leq 0.5\% \text{ @ } 600 - 1050\text{nm}$ Data outside this range is not guaranteed and is for reference only. Click Here to Download Data
N-BK7 with NIR II Coating Typical Transmission  Wavelength (nm)	Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI.

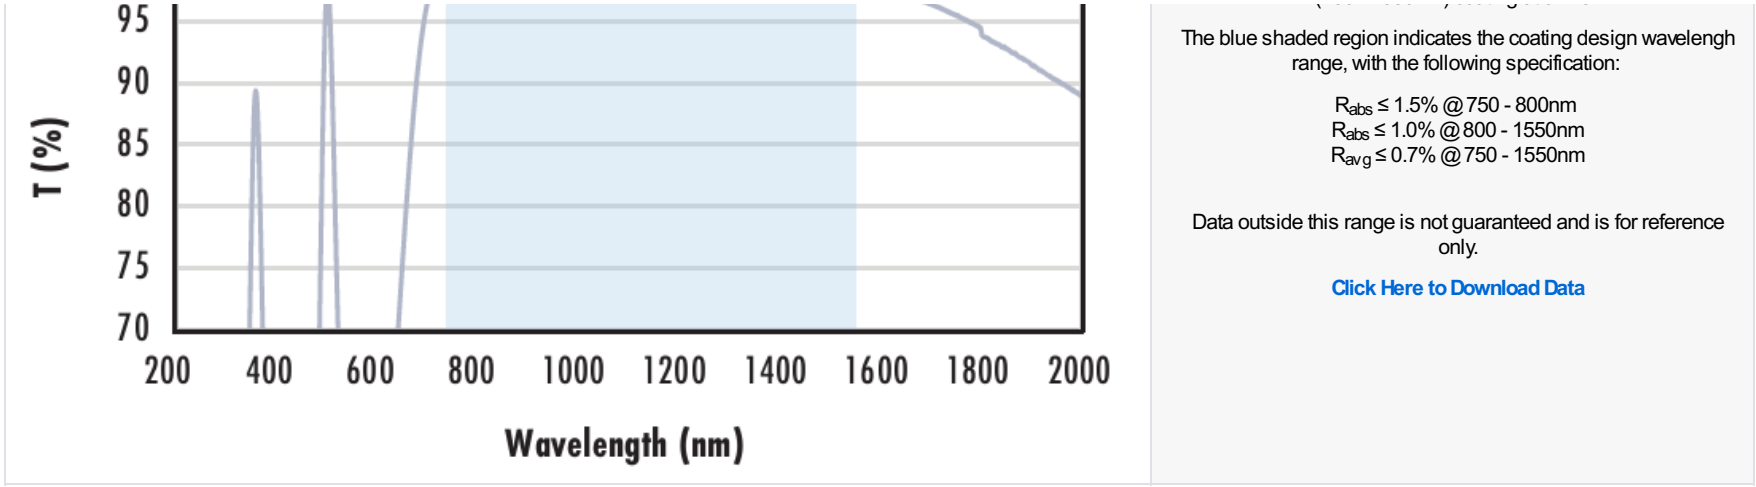

COATING CURVES

CUSTOM

Edmund Optics offers comprehensive custom manufacturing services for optical and imaging components tailored to your specific application requirements. Whether in the prototyping phase or preparing for full-scale production, we provide flexible solutions to meet your needs. Our experienced engineers are here to assist—from concept to completion.

Our capabilities include:

- Custom dimensions, materials, coatings, and more
- High-precision surface quality and flatness
- Tight tolerances and complex geometries
- Scalable production—from prototype to volume

Learn more about our [custom manufacturing capabilities](#) or submit an inquiry [here](#).